Infitek

BALANCES

Infitek Infitek Infitek Infitek Infitek

Infitek

Infitek Co., Ltd.

TEL: +86-531-88982330
FAX: +86-531-88983691
Website: infitek.com
Email: info@infitek.com
Service: support@infitek.com
Address: Room 201, Building A, No.1 Qianwan 1st Road, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen (Settled in Shenzhen Qianhai Business Secretary Co., Ltd.)

US Office

INFITEK INC.

522W RIVERSIDE AVE STE N,SPOKANE,WA 99201
EMAIL: INFO@INFITEK.COM




VERSION.26

0.0001g Analytical Balance

BA-E1004 BA-E1204 BA-E2004 BA-E2204



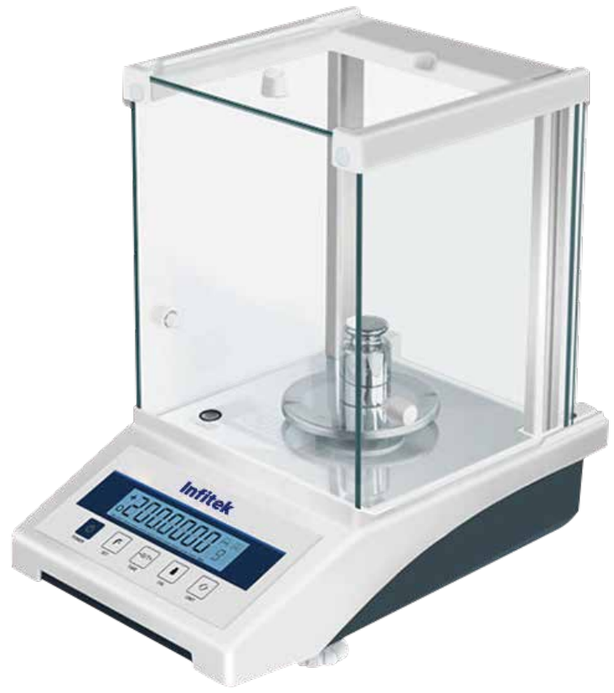

Product details







Description

- External calibration
- Sensitivity/Speed set/Percentage
- Electromagnetic force sensor
- Option:12.printer
- LCD(White back light with black front)
- Overload alarm/Fault alarm/Level indicator
- Tare function/Counting/Unit conversion
- Accumulation function/peak hold

Specifications

Model	BA-E1004	BA-E1204	BA-E2004	BA-E2204
Capacity(g)	100g	120g	200g	220g
Readability(g)	0.0001g			
Min weighing(g)	0.0004g			
Stable Time	≤3s			
Display	LCD(white back light with black font)			
Pan size	Φ80mm(Standard),Φ90mm(Optional)			
Operation temp	5-35℃			
Repeatability	±0.0002g			
Linearity	±0.0003g			
Dimension	300X200X295mm			
Draft shield size	180x175x200mm			
LCD Size	96x24mm			
Cal.weight	External calibration			
Option	RS232C(Standard)/Printer(Option)			
Package Dimension (W*D*H)(mm)	440*430*430mm			
G.W.(kg)	6kg			