Infitek

BALANCES

Infitek Infitek Infitek Infitek Infitek

Infitek

Infitek Co., Ltd.

TEL: +86-531-88982330
FAX: +86-531-88983691
Website: infitek.com
Email: info@infitek.com
Service: support@infitek.com
Address: Room 201, Building A, No.1 Qianwan 1st Road, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen (Settled in Shenzhen Qianhai Business Secretary Co., Ltd.)

US Office

INFITEK INC.


522W RIVERSIDE AVE STE N,SPOKANE,WA 99201
EMAIL: INFO@INFITEK.COM



VERSION.26

0.1g Precision Balance

BP-1K-B BP-2K-B

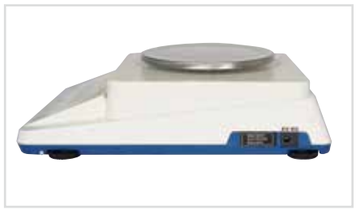



Description

- Min weighing set
- Fashional appearance
- AC and DC power supply
- LCD(White back light with black font)
- Tare function/Counting/ Unit conversion(g/ct/oz)
- Overload alarm/ Level indicator
- Option:Dual display/ Interface/Printer

Specifications

Model	BP-1K-B	BP-2K-B
Capacity(g)	1100	2100
Readability(g)	0.1	
Repeatability(g)	±0.2	
Linearity(g)	±0.3	
Min weighing(g)	0.4	
Stable Time	≤2s	
Pan Size	Φ130mm	
Operation temp	5-25 ℃	
Option	Printer, RS232, Weight	
Outline size	270x195x85mm	
Package Dimension (W*D*H)(mm)	Unit set Packing Size: 330*250*200mm Ten Packing Size: 660x470x320mm	
N.W(kg)	Unit set 2.5kg/Ten sets 25kg	
G.W.(kg)	Unit set 3kg/Ten sets 30kg	

0.1g Precision Balance

BP-3K-BF BP-5K-BF





Description

- Fashional appearance
- Min weighing set
- AC and DC power supply
- Large size stainless steel pan
- LCD(White back light with black font)
- Tare function/Counting/ Unit conversion(g/ct/oz)...
- Overload alarm/Level indicator
- Option:Dual display/ Interface/Printer

Specifications

Model	BP-3K-BF	BP-5K-BF
Capacity(g)	3100	5100
Readability(g)	0.1	
Repeatability(g)	±0.2	
Linearity(g)	±0.3	
Min weighing(g)	0.4	
Stable Time	≤2S	
Pan Size	160x160mm	
Operation temp	5-25 ℃	
Option	Printer, RS232, Weight	
Dimension	270x195x85mm	
Package Dimension (W*D*H)(mm)	Unit set Inside: 330*260*200mm Ten Outside: 660x470x320mm	
N.W(kg)	Unit set 2.5kg/Ten sets 25kg	
G.W.(kg)	Unit set 3kg/Ten sets 30kg	