Infitek

BALANCES

Infitek Infitek Infitek Infitek Infitek

Infitek

Infitek Co., Ltd.

TEL: +86-531-88982330
FAX: +86-531-88983691
Website: infitek.com
Email: info@infitek.com
Service: support@infitek.com
Address: Room 201, Building A, No.1 Qianwan 1st Road, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen (Settled in Shenzhen Qianhai Business Secretary Co., Ltd.)

US Office

INFITEK INC.

522W RIVERSIDE AVE STE N,SPOKANE,WA 99201
EMAIL: INFO@INFITEK.COM



VERSION.26

0.0001g Analytical Balance


BA-T1204 BA-T2004 BA-T2204





Product details



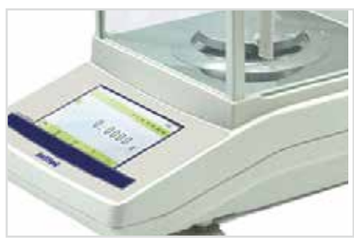



Description

- Internal auto calibration
- Electromagnetic force sensor
- 5 Inch touch panel
- Aluminum shell/Large space wind proof cover
- Under weighing
- Tare function/Counting/Density/Percentage
- Sensitivity/Speed set
- Unit conversion(g/mg/ct/oz/ib)...
- One key/Time trigger internal calibration
- Overload alarm/Fault alarm/Level indicator

Specifications

Model	BA-T1204	BA-T2004	BA-T2204
Capacity(g)	120	200	220
Readability(g)	0.0001		
Min weighing(g)	0.0004		
Stable Time	≤3s		
Display	LCD(white back light with black font)		
Pan size	Φ80mm		
Operation temp	5-35℃		
Repeatability	±0.0002g		
Linearity	±0.0003g		
Draft shield size	240mmx190mmx265mm		
Cal.weight	Internal Calibration		
Option	RS232(Standard), Printer(Option)		
Package Dimension (W*D*H) (mm)	520*390*540	500*380*530	530*390*530
G.W.(kg)	10.5		