
HCUS-300 Ultrasonic Level Transmitter-HART bus type



Application	Liquids
Measuring Range	0～20m
Connection Process	Thread
Process Pressure	≤0.3MPa
Accuracy	0.25%-1.0%
Protection Grade	Display Meter IP67/Probe IP68
Signal Output	(4-20)mA/HART
Explosion-Proof Grade	Ex d IIB T4 Gb,Ex ib IIB T6 Gb



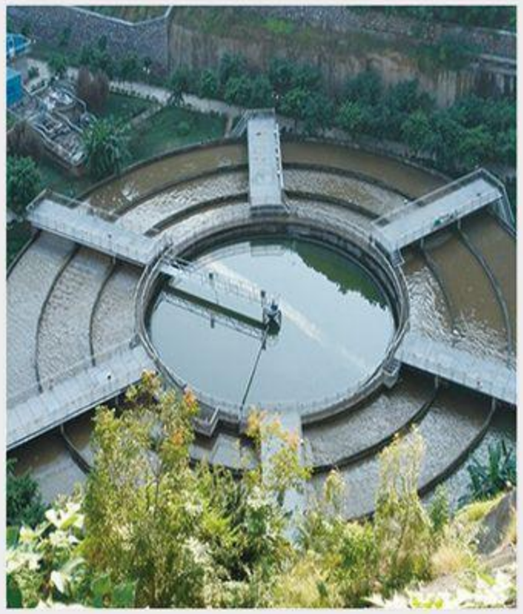

Type	Code	Parameters
Sensor Type	P	Standard
	T	Anti-Corrosion Type
	B	Standard explosion proof type
	F	Anti-corrosive explosion proof type
Housing/Material	L	Die-casting aluminium/Single chamber/IP67
	G	Die-casting aluminium/Dual chamber housing/IP67
	S	Plastic housing IP/66
Probe Mounting Size	G	hread G1.5,Rated Range 5m
	H	Thread G2,Rated Range 5m,10m
	J	Thread G78*2,Rated Range 20m
	Y	Special Custom
Power Supply	A	220 V AC
	D	24 V DC
	Y	Special Custom
Output Mode	N	(4-20)mA+HART bus
	Y	Special Custom
Cable Inlet	M	M20*1.5
Remote Display	W	With
	N	N/A
	Z	N/A, remain the terminals
D&H for side display	XXX	Unit : m
Sensor Range	XXX	Unit : m
Special Custom	X	Special Custom